


FULLA.



HIGHLY ADJUSTABLE.

The Fulla is highly adjustable as a form of illumination. The turnable and tiltable cardanic downlight, with a timeless design and unlimited options regarding light colour, control options and light distributions, blends seamlessly into a wide variety of settings. This makes it a perfect lighting solution for retail, office and showroom environments.

FULLA S.

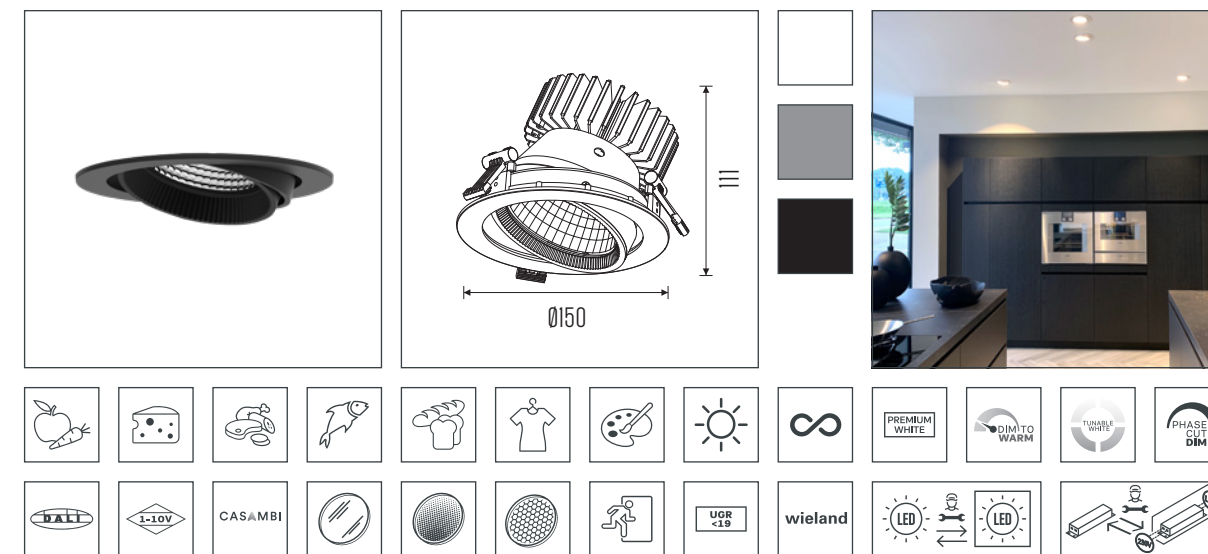


Adjustability	: 350° rotational and 30° tiltable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 140mm	Optic	: Facet Anodized Aluminum Reflector 15°, 30°, 45°, 55°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 3500lm	Net Weight [kg]	: 1.00kg
System Power [W]	: max. 30W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 137lm/W		

Go to full specs



FULLA S HE.

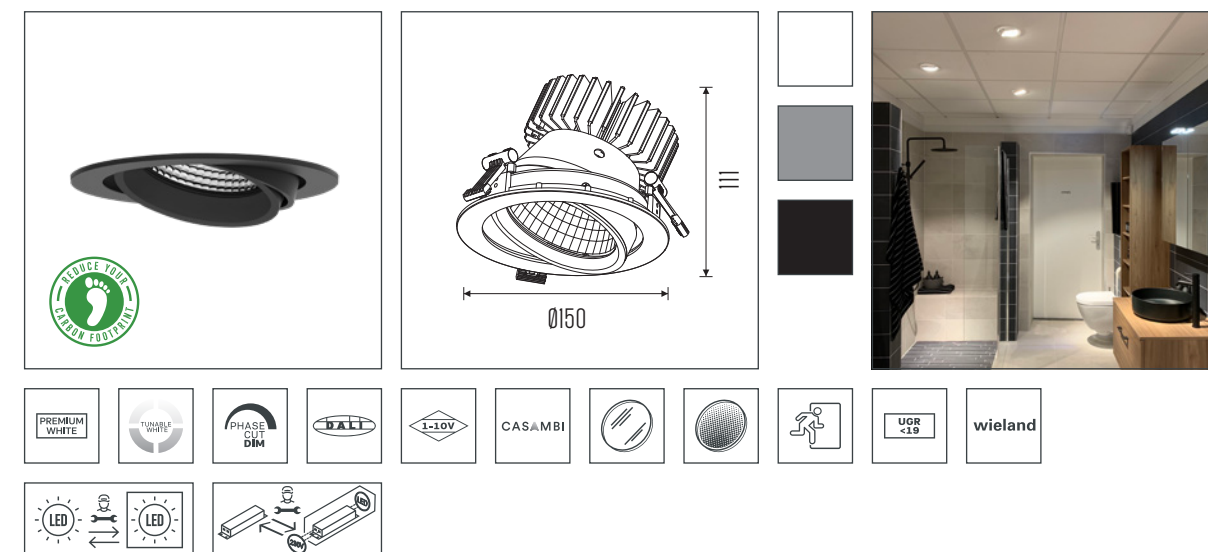


Adjustability	: 350° rotational and 30° tiltable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 140mm	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 60°
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4150lm	Net Weight [kg]	: 1.00kg
System Power [W]	: max. 31W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 153lm/W		

Go to full specs




FULLA S HE X-FLIP.

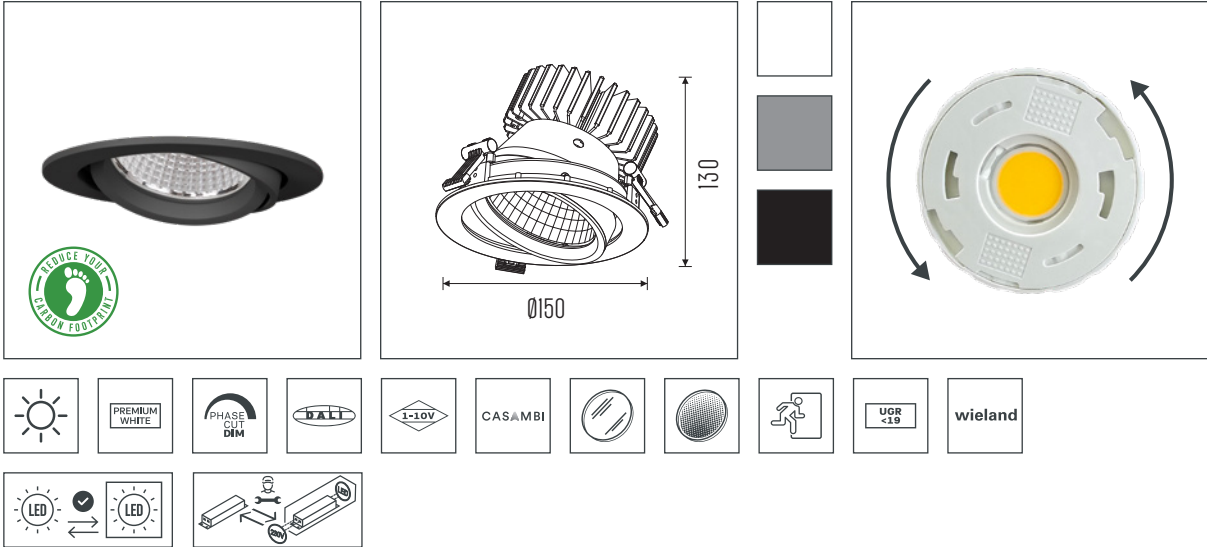

Adjustability	: 350° rotational and 30° tiltable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 140mm	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 60°
CCT [K]	: 2700K, 3000K, 4000K, 3000K PW, 4000K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 2600lm	Net Weight [kg]	: 1.00kg
System Power [W]	: max. 19W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 137lm/W		



FULLA L.

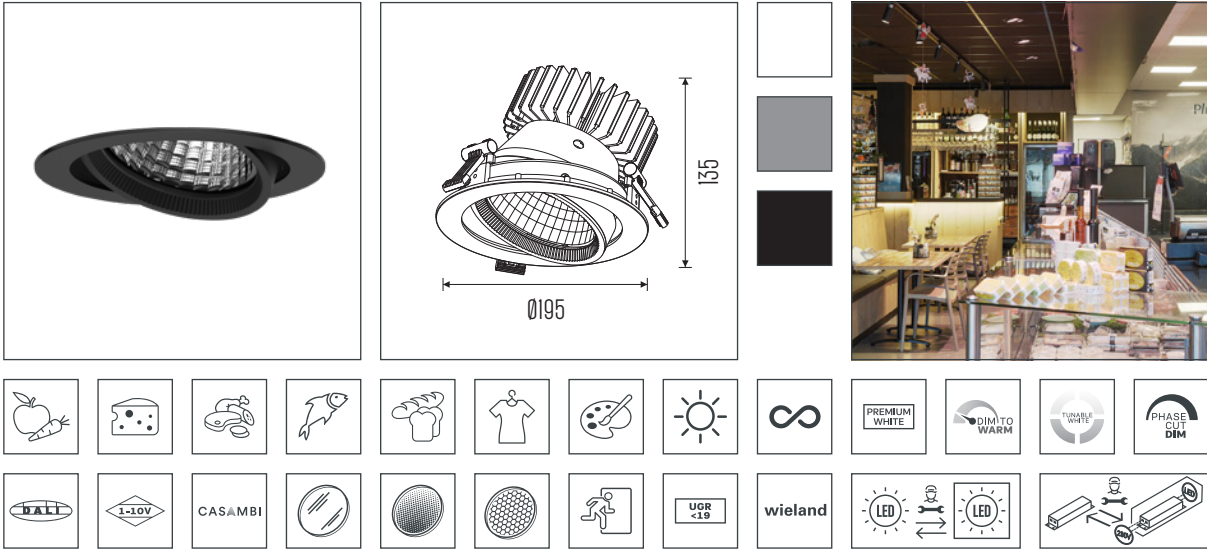

Adjustability	: 350° rotational and 30° tiltable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 185mm	Optic	: Facet Anodized Alu. Reflector 15°, 24°, 36°, 45°, 60°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4500lm	Net Weight [kg]	: 1.00kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 137lm/W		



#LIGHTBUILDERS | WAREHOUSE